

The Convenient and Safe Attic Storage Solution

Eliminates the danger of carrying storage items up steep, shaky attic ladders & stairs.


Versa Lift is the ultimate solution to your storage problems. Now you can keep your home and garage neat by sending storage items into the attic and out of sight with push-button ease!

Award winning design and engineering of the Versa Lift provides you an attic lift system that enables you to easily store everything out of sight and bring it back in seconds whenever you need it. Other storage systems can't give you easy access to hidden attic storage space. Only the Versa Lift can!


- **Eliminates the Danger** of carrying storage items up steep, shaky attic ladders, walk-ups, and basement steps.
- **Perfect for Homes** with elevated living quarters, such as split-levels, coastal homes, and homes with basement living rooms.
- **Convert Your Attic** into a huge hidden storeroom with just some plywood decking and the award winning Versa Lift storage system
- **Store and Retrieve** loads up to 250 lbs. (depending on model) with push-button ease
- **Comes Standard** with 15 foot corded remote with locking key switch. Wireless remote and wall switches available.



Don't risk injury climbing stairs with heavy items!

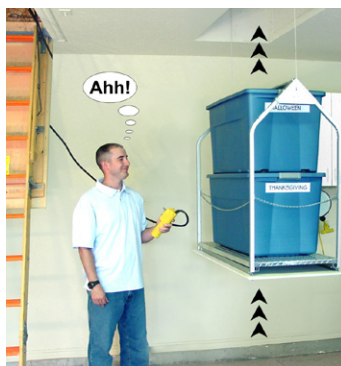


Easily store and retrieve items up to 250 lbs!



Versa Lift™

Attic Storage Lifting System

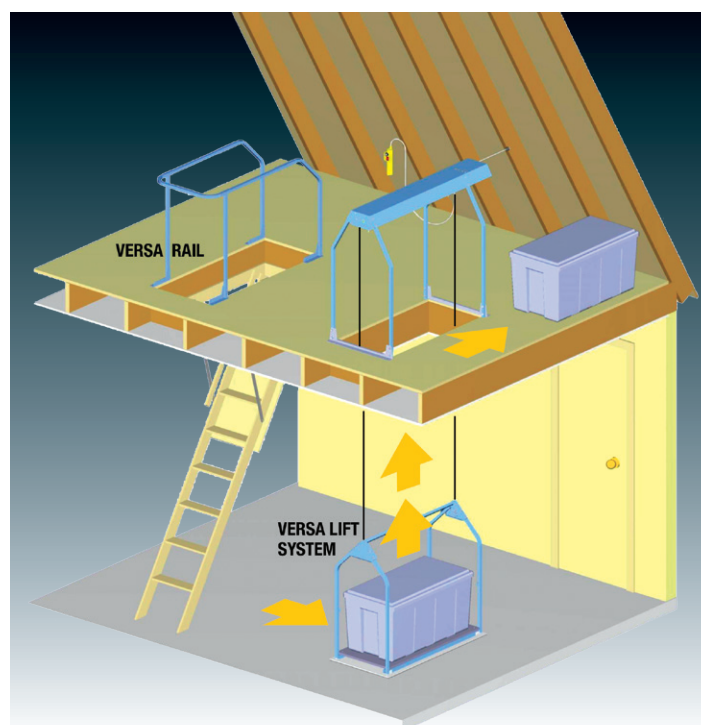

www.versaliftsystems.com

Exclusive Features and Benefits...

Two Large Lift Models to choose from:

VERSA LIFT 24



Lifting Capacity: 15.3 cubic feet, 200 lbs./load
Inside Dimension: 20.75" W x 44" L x 39" H
Frame Out Dimension: 22.5" x 46.5"
4' height standard, or 3' unit available at same cost.

VERSA LIFT 32



Lifting Capacity: 35 cubic feet, 250 lbs./load
Inside Dimension: 28.75" W x 56" L x 52.5" H
Frame Out Dimension: 30.5" x 58.5"
5' height standard, can be cut down for extra charge.



Versa Lift "Level-Up" design, raises the platform flush to the attic floor to unload cargo without lifting.



Versa Lift "Auto-Close" feature seals the ceiling opening and automatically adjusts for joist heights up to 18 inches.



Versa Lift "Auto-Stop" feature automatically stops flush with attic floor when raising and garage floor when lowering.

Versa Lift: Ideas and Accessories

Unique Customer applications for Versa Lift



Unique outside deck installation




Print Shop installation



Shaft installation





Closet installation

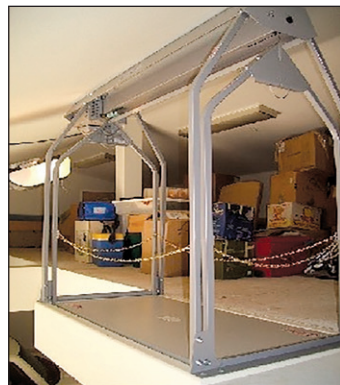

Cantilever installation


Here are just a few of the countless "clutter" items you can store out of sight and get back in seconds when you need them!

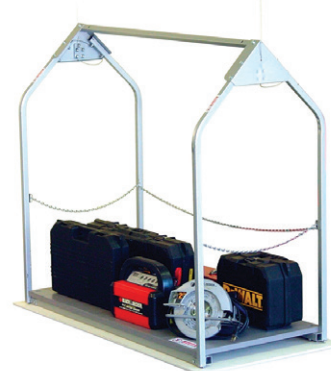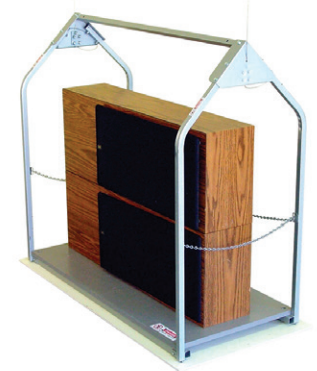

Useful Accessories Available



Auto Close Door

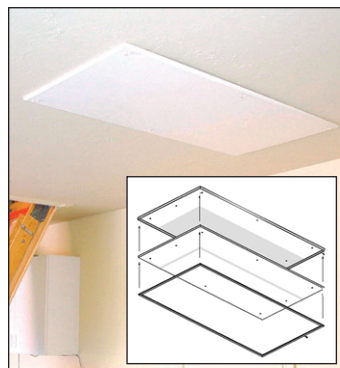

Fire Rated Ceiling Panel

VERSA LIFT MODEL 24 SPECIFICATION GUIDE

The Versa Lift is designed to move cargo between adjacent floors. The lift's power head mounts over an opening in the upper floor and extends 12" past the framed out opening on the motor end. When ascending, the lifting platform automatically stops level with the upper floor. When descending, the lifting platform automatically stops upon contacting the lower floor. The remote control switch operation is momentary and the motor brake is applied instantly whenever the switch is released or power loss occurs. The ceiling cover is attached to the carrier with four springs in the legs that stretch up to 18" holding it tight against ceiling as the carrier automatically becomes flush with the floor of your attic. This white powder coated panel can be sealed with common weather stripping and painted if desired.

Installation Requirements:


Opening Required: 22.5 x 46.5" (+.25", -0")

Opening Finish: Smooth perpendicular sidewalls

Electrical: 115 vac grounded power outlet

Installation Recommendations:

Versalift's 110v electrical outlet may be on the same circuit as attic lighting if desired and should be mounted within 6' of the motor end. Lift motor pulls 5 amps. For Corded models, the opening should be close enough to the attic ladder to allow the 15' remote cord to reach through ladder opening. See wiring guide for 2 switch installs. For framing dimensions, see the rough-in sheet or refer to the Versa Lift Installation guide available on website.

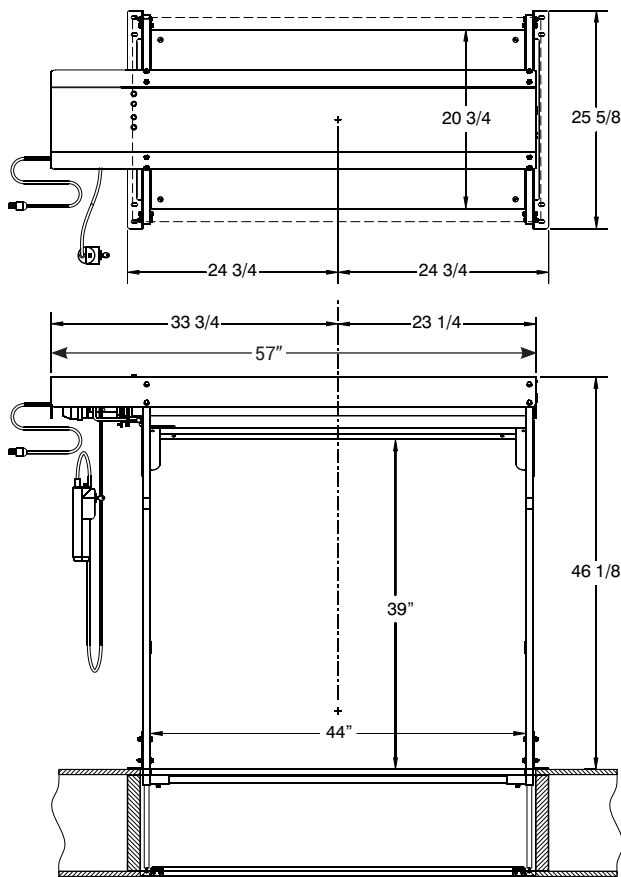

Models 24, 24H, 24HX, 24HXX (15' Standard Corded Control)
Models 24, 24M, 24MH, 24MHX, 24MHXX (2 Wall Switches)
Models 24, 24W, 24WH, 24WHX, 24WHXX (1 Wireless Control)
Note: H=High, HX=Extra High, HXX=XXHigh (20')



Corded Remote



(2) In-Wall Switches, 1 upstairs, 1 down



Wireless Remote

Specifications:

Corded Models: Hand-held remote w/15' cord & keylock

Switched Models: 2 In-Wall Switches

Wireless Models: 1 Wireless hand-held remote

Attic Floor-to-Garage Floor measured distance:

Model 24 = 8-11', 24H=11-14', 24HX=14-17', 24HXX=17-20'

Model 24M= 8-11', 24MH=11-14', 24MHX=14-17',
 24MHXX=17-20' Switches

Model 24W= 8-11' 24WH=11-14', 24WHX=14-17',
 24WHXX=17-20' Wireless

Joist Height Max: 18" (incl. decking & sheet rock)

Lifting Capacity: 15.3 Cu. Ft., 200 lbs. per load

Platform Dimensions: 20³/₄"W" x 44L" x 39H" Max I.D.

Lift Speed: 8"/sec. (10-ft. in approx. 15 seconds)

Cables (2): .093 steel w/zinc plating 1,000 lb. break

Construction: Powder coated steel

Motor: 0.6 HP Gear motor with automatic brake

Voltage/Power: 115 vac, 60 hz, 4.5 amps


Power-Head Dimension: 26W x 57L x 46.25H

Opening Required: 22¹/₂ x 46¹/₂" (+.5", -0")

Opening Finish: Smooth perpendicular sidewalls

Shipping Weight: 170 lbs.

Versa Lift illustrated in the raised (UP) position.

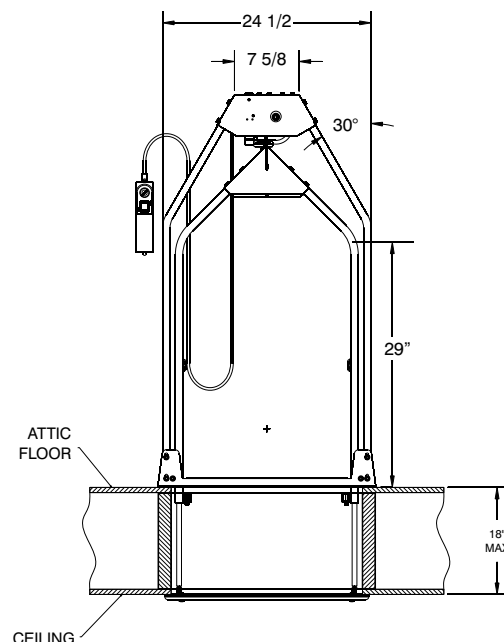

VERSA LIFT MODEL 32 SPECIFICATION GUIDE

The Versa Lift is designed to move cargo between adjacent floors. The lift's power head mounts over an opening in the upper floor and extends 12" past the framed out opening on the motor end. When ascending, the lifting platform automatically stops level with the upper floor. When descending, the lifting platform automatically stops upon contacting the lower floor. The remote control switch operation is momentary and the motor brake is applied instantly whenever the switch is released or power loss occurs. The ceiling cover is attached to the carrier with four springs in the legs that stretch up to 18" holding it tight against ceiling as the carrier automatically becomes flush with the floor of your attic. This white powder coated panel can be sealed with common weather stripping and painted if desired.

Installation Requirements:


Opening Required: 30.5 x 58.5" (+.5", -0")

Opening Finish: Smooth perpendicular sidewalls

Electrical: 115 vac grounded power outlet

Installation Recommendations:

Versalift's 110v electrical outlet may be on the same circuit as attic lighting if desired and should be mounted within 6' of the motor end. Lift motor pulls 5 amps. For Corded models, the opening should be close enough to the attic ladder to allow the 15' remote cord to reach through ladder opening. See wiring guide for 2 switch installs. For framing dimensions, see the rough-in sheet or refer to the Versa Lift Installation guide available on website.

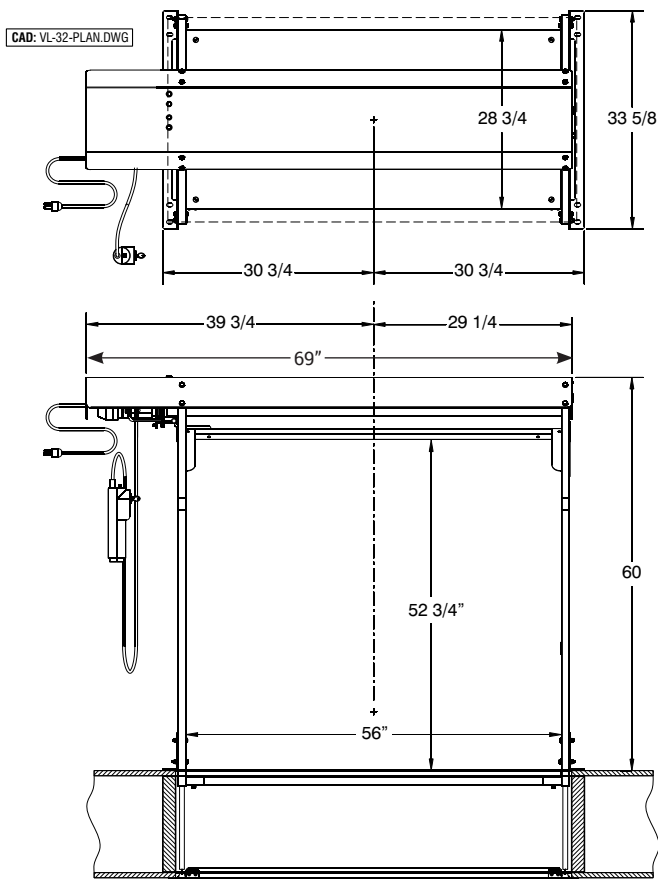

Models 32, 32H, 32HX, 32HXX (15' Standard Corded Control)
Models 32, 32M, 32MH, 32MHX, 32MHXX (2 Wall Switches)
Models 32, 32W, 32WH, 32WHX, 32WHXX (1 Wireless Control)
Note: H=High, HX=Extra High, HXX=XXHigh (20')



Corded Remote



(2) In-Wall Switches, 1 upstairs, 1 down



Wireless Remote

Specifications:

Corded Models: Hand-held remote w/15' cord & keylock

Switched Models: 2 In-Wall Switches

Wireless Models: 1 Wireless hand-held remote

Attic Floor-to-Garage Floor measured distance:

Model 32 = 8-11', 32H=11-14', 32HX=14-17', 32HXX=17-20'

Model 32M= 8-11', 32MH=11-14', 32MHX=14-17',
 32MHXX=14-17' Switches

Model 32W= 8-11' 32WH=11-14', 32WHX=14-17',
 32WHXX=17-20' Wireless

Joist Height Max: 18" (incl. decking & sheet rock)

Lifting Capacity: 35 Cu. Ft., 250 lbs. per load

Platform Dimensions: 28.75" x 56" L x 52.5" H Max I.D.

Lift Speed: 8"/sec. (10-ft. in approx. 15 seconds)

Cables (2): .093 steel w/zinc plating 1,000 lb. break

Construction: Powder coated steel

Motor: 0.6 HP Gear motor with automatic brake

Voltage/Power: 115 vac, 60 hz, 4.5 amps


Power-Head Dimension: 34W x 69L x 60H

Opening Required: 30.5 x 58.5" (+.5", -0")

Opening Finish: Smooth perpendicular sidewalls

Shipping Weight: 206 lbs.

Versa Lift illustrated in the raised (UP) position.

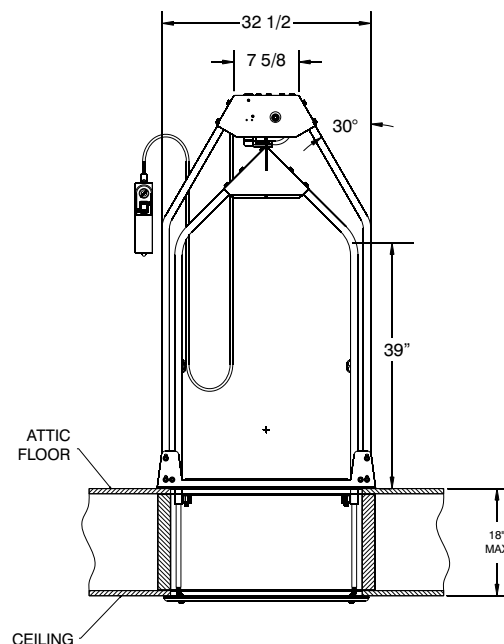

4 Easy Steps to Order:

Step 1

Measure from top of attic floor down to garage floor for correct unit.

We can go up to 20' (floor to floor).

Please do not measure garage floor to ceiling. Measure garage floor to attic floor.

Step 2

Check your head room in attic for best location & height in attic.

Model 24 available in 3' or 4' height.

Model 32 requires 5' of headroom.

Can be cut down for extra charge.

Step 3

3 Ways to operate.

Choose the one below that best suits your needs: corded, 2 wall switches, or wireless



**CORDED
REMOTE**

10' cord plugs into lift with key lock switch in handle.



**IN-WALL
REMOTE**

2 mounted wall switches. One upstairs, one downstairs with key lock.




**WIRELESS
REMOTE**

Easy-to-use wireless remote with belt clip.

Step 4

Order your desired unit TODAY and get organized!

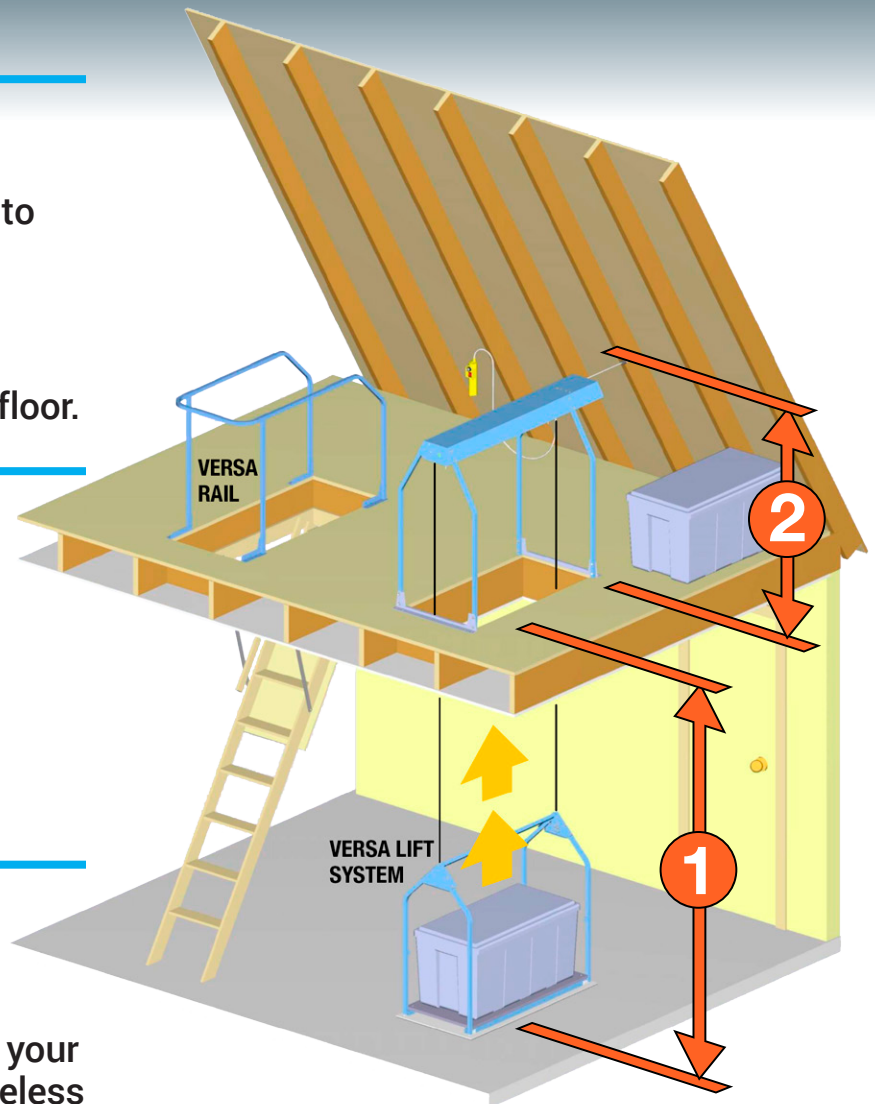

Versa Lift TM
Attic Storage Lifting System

Call Us

Call us if you have ANY questions!
(405) 516-2412 8-5 M-F CST

Over half of the units we sell are installed by homeowners or friends with some carpentry and handyman skills.

If you do not have an installer, call us, we have experienced handyman/installers in many areas of the U.S. or we can help you find one.

Versa Rail: Low Cost Safety Solution


Provides comfort and security entering or exiting the attic.

Building codes require safety railings on stairways and landings in the home. However, the attic ladder landing has been ignored and left unprotected by home builders and code inspectors for years.

The **Versa Rail** add-on accessory solves this safety problem and installs in minutes with ordinary tools!



PROBLEM: *Entering or exiting the attic from an attic ladder is very dangerous without a hand-rail... and the ladder opening is a falling hazard while you work in the attic!*

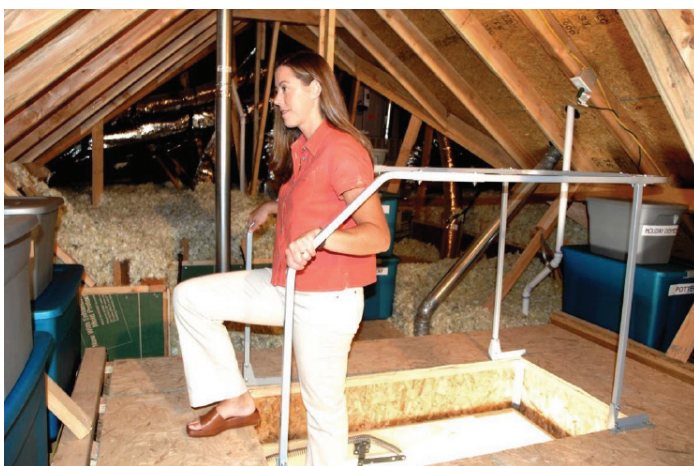

SOLUTION: *The Versa Rail dual grab rails provide comfort and security when you are entering or exiting the attic ... and it surrounds the ladder opening for safety!*



Versa-Rail™

Attic Ladder Safety Railing

Versa Rail Model 60 Specifications:

Construction: powder-coated steel frame

Assembly: hardware included

Shipping Wt.: 24 lbs.

Vertical Space: 38" min. floor to rafters

Opening Sizes: adjusts from 22.5" x 54" to 30" x 60" to fit most standard attic ladders

Assembly and Installation:

Tools Req'd: wrenches & hand drill

Skill Level: handyman

www.versaliftsystems.com

Our Customers Say It Best!



"Put that stuff where it belongs and enjoy your garage again!"

Real Testimonials from Real Customers

(see the live videos on our website!)



"My wife has probably 30 tubs of Christmas decorations, we wish we had bought a Versalift years ago"

"We had one in our old house so when we started building this one the Versalift was the first thing we bought"

"Buying a Versalift was probably the best thing I ever did for our marriage!"

"I would tell you that it's probably one of the best investments we made in building our last home."



Versa Lift  TM
Attic Storage Lifting System

Versa-Rail TM
Attic Ladder Safety Railing

www.versaliftsystems.com • (405) 516-2412
Brought to you by CYNERGY CORPORATION